

ProID Series

Physical Access Readers



ProID10



ProID40



ProID20



ProID30

The ProID family of card readers is designed to provide different options for customers. Which can support 125KHz EM, 13.56MHz MIFARE/DESFire/FeliCa/Legic.

ProID card reader adopts all-weather protection design with architectural crafting, grand appearance, and easy indoor & outdoor installation and application.

Features

- With upgraded card reading solution comes higher stability of operation and energy efficiency.
- LED lights and Touch Keypad.
- Wiegand data port with 26-digit or 34-digit output for customization.
- Sealed design suitable for both indoor and outdoor use.
- Black or White color available

Specifications

Read Range

ProID10 EM/IC 3.5cm
ProID20/30/40 EM/IC 5cm

Reading Time

≤300ms

Input Port

External LED Control
External Buzzer Control

Material

ABS+PC

Output Format

Wiegand 26bit or 34bit Adjustable

Power

Operating Voltage 7 ~ 13VDC
Current Draw < 80mA

LED

Pulsing White Standby Light
Red and Green LEDs

Operating Temperature

-20 °C ~ 65 °C

Operating Humidity

10% ~ 90% Relative Humidity
Non-Condensing

Audio

Beep

Index Protection


IP65

Dimensions

ProID10: 80.5 × 44 × 15mm
ProID20/30: 90 × 90 × 16mm
ProID40: 116 × 75 × 15mm

ProID series order instructions

ProID10 WE-RS

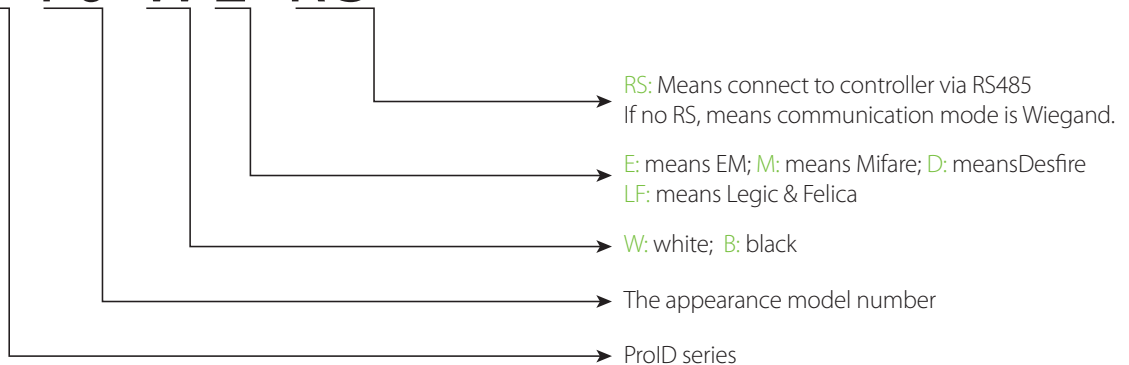

ZKTeco Middle East
E-mail: sales@zkteco.me
www.zkteco.me

© Copyright 2015, ZKTeco Inc. ZKTeco Logo is a registered trademark of ZKTeco or a related company. All other product and company names mentioned are used for identification purposes only and may be the trademarks of their respective owners. All specifications are subject to change without notice. All rights reserved.

